
CONTAINER CONVERSIONS

Durban: +27 31 769 1100 Johannesburg: +27 11 975 3800 info@container.co.za





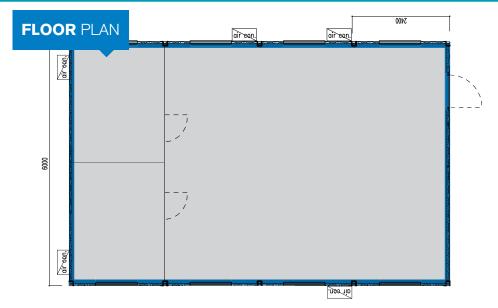

Made from cold rolled, welded steel profile, 4mm thick; 4 corner casts, SPHC. 12PCS steel cross members, 0235A, 3mm thick. FORKLIFT POCKET SIZE: 90mm x 256mm x 1200mm. SUBFLOOR: 0.5mm thick galvanised steel sheet.

18mm cement floor.

FRAME ROOF

Made from cold rolled, welded steel profile, Q235A, 3mm thick; 4 corner casts. 9PCS steel cross members, Q235A, thickness 3mm INSULATION: 50mm EPS (density: 12kg/m3) & 50mm Mineral Wool (density: 40kg/m3). ROOF COVERING: 0.5mm thick galvanised

CEILING: 0.5mm thick galvanised steel sheet.

CORNER POSTS

Q235A, 3mm thick.

WALL PANELS

40mm polystyrene insulation with chromadek cladding internally and externally.

WINDOWS

8 x large aluminium windows (900mm x 1200mm) with aluminium burglar guards & vertical blinds.

DOOR

1 x external chromadek door (840mm x 2040mm), 2 x internal chromadek doors (840mm x 2040mm).

ELECTRICS

Distribution board, earth leakage, 8×15 amp double plug points, $2\times$ single fluorescent lights, $3\times$ double fluorescent lights, $3\times$ light swithes, 3 x dedicated air conditioner plug points.

FLOORING

Marley industrial flooring.

AIRCON

3 x 12000btu heating & cooling air conditioner.